


YAMUNA DENSONS Red Mastic Tape

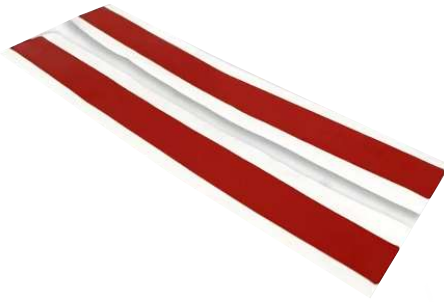

Features :

- Void Filling
- Water Proof
- Self Amalgamating
- Oil Resistance
- Anti Track

Specifications:

Red Mastic Tape

Code	Width	Thickness	Length
DRMT400	25 ± 2 mm	1.5 ± 0.3 mm	300 ± 5 mm

Technical Data for Black Mastic Tape

Property	Requirements	Test Method
Low Temperature Flexibility (4 hrs at -20 C)	No Cracking	ENATS 09 13
Continuous Operating Temperature	No Splitting, Cracking, Dripping or Following at 100 C.	ENATS 09 13
Ultimate Elongation	100% (min.)	ASTM D 412
Visual Examination	Free From Pin Holes, Cracks, Inclusions & Other Visible Defects	
Volume Resistivity	1 x 10 ¹² ohm cm. (min.)	ASTM D 257
Colour	Red	
Water Absorption	0.5% (max)	ENATS 09 13
Amalgamation	The tape becomes one mass after application. This can be tested on any size of metal mendel. The mass (tape) after application can be easily cut longitudinally with a knife and will then be checked for its amalgamation. It is observed that the tape does not crack after application, thus passing the amalgamation test.	